

Durofabric Butyl Square

Self-adhesive butyl floor sleeve for a permanent sealing of floor drains in combination with sealing systems under tiles in wet rooms.



Properties

Self-adhesive watertight, easy to handle butyl floor sleeve. The sleeve is made from butyl rubber with polypropylene fleece coated. This material basis causes an excellent bonding with almost any waterproofing materials used under tiles extending over the entire surface of the sleeve.

Applications

Durofabric Butyl Square is used to permanently waterproof ground drains. The packing is complete embedded into the sealing compound.

Technical specifications

Total measurements	370 x 370 mm
Measurements butyl	300 x 300 mm
Thickness butyl	1.0 mm
Temperature resistance	-40°C to +70°C

Preparation of the substrate

The preparation of the surface depends on the respective waterproofing system used.

USE

Remove the protective sheet from half each and press the packing by and by onto the surface. Now remove the second half of the foil and press the sleeve completely onto the surface. Can be instantly coated with waterproofing compound.

Information on further processing


Solvent-free adhesives and coatings may be applied directly onto the Durofabric Butyl Square. Before applying further products a compatibility test has to be carried out.

Cleaning of tools and equipment:

Tools and soiled areas should be cleaned immediately after use with water.

Storage

Durofabric Butyl Square can be used for a period of at least 12 months when stored in a cool and dry period.

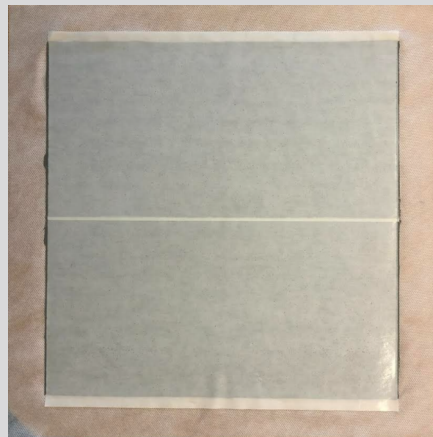

Supplied as

10 pieces / carton

Further units available on request.

Disposal

May be disposed of as building site waste.



Durotech Industries Pty Ltd

Address 14 Essex Street, P.O Box 5092, Minto,
NSW 2566

Phone +61 2 9603 1177

Fax +61 2 9475 5059

Email sales@durotechindustries.com.au

Web www.durotechindustries.com.au

We took the greatest possible care in formulating and producing this product. It is the result of years of practical experience and extensive laboratory investigations. The proper and successful processing and application of our products are beyond our control. For this reason our warranty is strictly limited to the quality of products in the context of our Terms and Conditions of Business and explicitly excludes any processing or application. The publication of the present instruction sheet renders all previous publications on this product as well as the technical specifications therein null and void.

