

DURO TORCH 3MM

APP COMPOUND-HIGH STRENGTH POLYESTER



DESCRIPTION

Duro Torch 3MM is a bituminous, plastomeric, torch-on sheet membrane. It is manufactured from a compound based on a selected distilled bitumen modified with atactic polypropylene polymer bitumen (APP) and reinforced with a high strength non-woven spun bound polyester fabric. The combination of high performance polymer bitumen and non-tear polyester reinforcement provides a durable system ensuring good flexibility at low temperatures and excellent heat resistance.

BENEFITS AND ADVANTAGES

The Duro Torch range is manufactured under ISO 9001 Total Quality guidelines.

USES


Duro Torch 3mm exhibits both excellent dimensional and mechanical stability, making it particularly suitable for waterproofing civil, industrial and residential building projects. It is often used as the base layer of a multi layer membrane system.

APPLICATION

The underside of Duro Torch 3MM is finished with a thermofusible film, which melts upon torching, ensuring a clean application. Surfaces to be waterproofed should be dry, clean, smooth and free of protrusions. All surfaces should be primed with Duroproof™ Bitumen Primer. The membrane is torched on with minimal use of a propane gas flame, making it easy and quick to apply. Apply heat to the underside of the membrane and melt down part of the bituminous undercoating. Form overlaps along the side of 8-10cm and 12-15cm laps at the ends.

ADDITIONAL INFORMATION

Keep the product away from solvents and organic liquids as they may damage the product. When laying the membrane, the surface must be free from any items which may puncture the membrane.

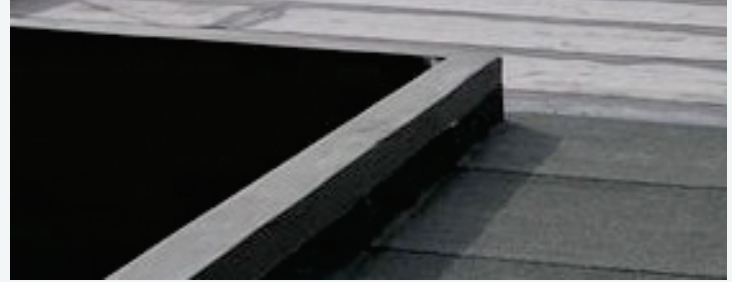

Do not apply in rain or if the temperature is below 5°C. Store rolls in upright position. When unloading avoid impact damage particularly at roll ends.

Test Method	Features	UOM	Nominal Values
EN 1848 - 1	Length	m	10
EN 1848 - 1	Width	m	1
EN 1849 - 1	Thickness	mm	3.0mm
EN 1107 - 1	Dimensional stability	-0.5%T -0.3%L	Conforms to UNI8629
EN 12311 - 1	Tensile Strength long Tensile Strength trans	N/50mm N/50mm	640-800 560-700
EN 12311 - 1	Elongation at break longitudinal Elongation at break transversal	% %	45 45
EN 12310 - 1	Tear Resistance L & T	N	150
EN 1109	Cold Flexibility	°C	-10
EN 1110	Heat Resistance	°C	120
EN 1928	Water Tightness	Kpa	>60
EN 1928	Water Resistance	%	±2

DUROTECH INDUSTRIES

"This document, including any attached files, is strictly confidential and intended solely for the use of the individual or entity to which it is addressed. Durotech Industries prohibits the right to publish, copy, distribute or disclose any information contained in this document, or its attachments, by any party other than the intended recipient. If you have received this document in error please notify the sender and delete it from your system immediately. no employee or agent is authorised to conclude any binding agreement or make any representation on behalf of Durotech Industries. The views or opinions presented in this document are solely those of the author and do not necessarily represent those of Durotech Industries, except where the sender expressly, and with clear authority, states them to be the views of Durotech Industries. Durotech Industries accepts no liability for any loss or damage (direct or indirect or consequential) arising from the use of or in connection with this document and any attachments and suggests that the recipient check this document and any attached files for the presence of viruses."

